

Purge Valves

Features


- Pressure rating up to 4,000psig(275bar) for 316 stainless steel and up to 3,000psig(206bar) for Carbon Steel and Brass at 100°F(38°C).
- Temperature rating from -65°F to 600°F(-54°C to 315°C) with Stainless Steel, from -65°F to 400°F(-54°C to 204°C) with carbon steel, from -20°F to 350°F (-29°C to 177°C) with brass.
- Vent hole bleeds excessive liquid or gas from system lines.
- Knurled cap is crimped to valve body for prevents accidental remove from body.
- Size range from 1/8" thru 1/2" tubing and piping system.
- Variety of end connections including Hy-Lok tube fittings, male/female NPT and ISO, SAE threads.



Materials of Construction

Description	Body Materials		
	Grade / ASTM Specification		
	316 SS	Carbon Steel [Ⓢ]	Brass
Body [Ⓢ]	316 / A479	Carbon Steel	Brass
Knurled Cap			
Poppet	316 SS		
Spring	302 SS		

- Ⓢ Temperature rating is limited to -20°F (28°C) min.
Yellow zinc plated for corrosion resistance.
- Ⓢ Male straight thread (SAE) body with FPM O-ring (e.g Viton)

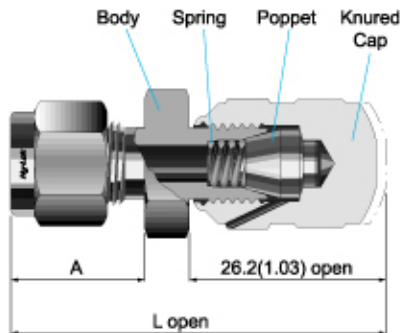

Option

- **PTFE Poppet**
PTFE poppet provides leak tight shut - off with finger.
Pressure rating up to 200 psig (13.7bar) at 100°F (37°C)
Temperature rating up to 300°F (176°C)
To order, add designator - P as a suffix to the basic part number.
Example : PV H - 8T - P

Applications

Hy-Lok Purge valves are for bleed, vent or drain purpose manually. The knurled cap is not separable from the valve body for safety purpose. 1/4 turns of wrench pull-up from finger tight give leak-free closure on first make-up. Proper tightening with a wrench secures closure to the desired pressure rate with sufficient make-ups.

Table of Dimension

Basic Part Number	Inlet End Connection	Dimensions				
		A		L		
		in.	mm	in.	mm	
PV	F -2N	1/8 Female NPT	0.53	13.5	1.56	39.6
	F -4N	1/4 Female NPT	0.72	18.3	1.75	44.4
	F -6N	3/8 Female NPT	0.78	19.8	1.81	46.0
	F -8N	1/2 Female NPT	0.97	24.6	1.98	50.3
	M -2N	1/8 Male NPT	0.38	9.7	1.62	41.1
	M -4N	1/4 Male NPT	0.56	14.2	1.81	46.0
	M -6N	3/8 Male NPT	0.56	14.2	1.84	46.7
	M -8N	1/2 Male NPT	0.75	19.1	2.09	53.1
	M -4U	1/4in., 7/16-20	0.38	9.7	1.69	42.9
	M -8U	1/2in., 3/4-16	0.44	11.2	1.81	46.0
	H -2T	1/8 Hy-Lok	0.59	15.24	1.84	46.7
	H -4T	1/4 Hy-Lok	0.69	17.78	1.94	49.3
	H -6T	3/8 Hy-Lok	0.75	19.3	2.03	51.6
	H -8T	1/2 Hy-Lok	0.88	21.84	2.19	55.6
	H -6M	6mm Hy-Lok	0.69	17.7	1.94	49.3
	H -8M	8mm Hy-Lok	0.72	18.6	2.0	50.8
T -4T	1/4 Tube Stub	0.63	16.0	1.87	47.5	
T -6T	3/8 Tube Stub	0.69	17.5	1.94	49.3	
T -8T	1/2 Tube Stub	0.91	23.1	2.15	54.6	

Dimensions are for reference only, subject to change.

Caution When installing a Hy-Lok purge valves, the vent hole should be positioned not to influence the system fluid on operators. As the vent hole turns with the cap, discharging the valve is executed by turning the cap. Be sure that purge valves should be always slowly opened in order to protect operators from exposure to hazardous system fluids.

How To Order

Use S316 for 316 stainless steel or STEL for carbon steel, BRAS for brass as a suffix to the basic part number.
Example : PV H - 4T - S316



Distributed by :

www.hy-lok.com